


Reach overview

Truck-mounted concrete pumps



Putzmeister

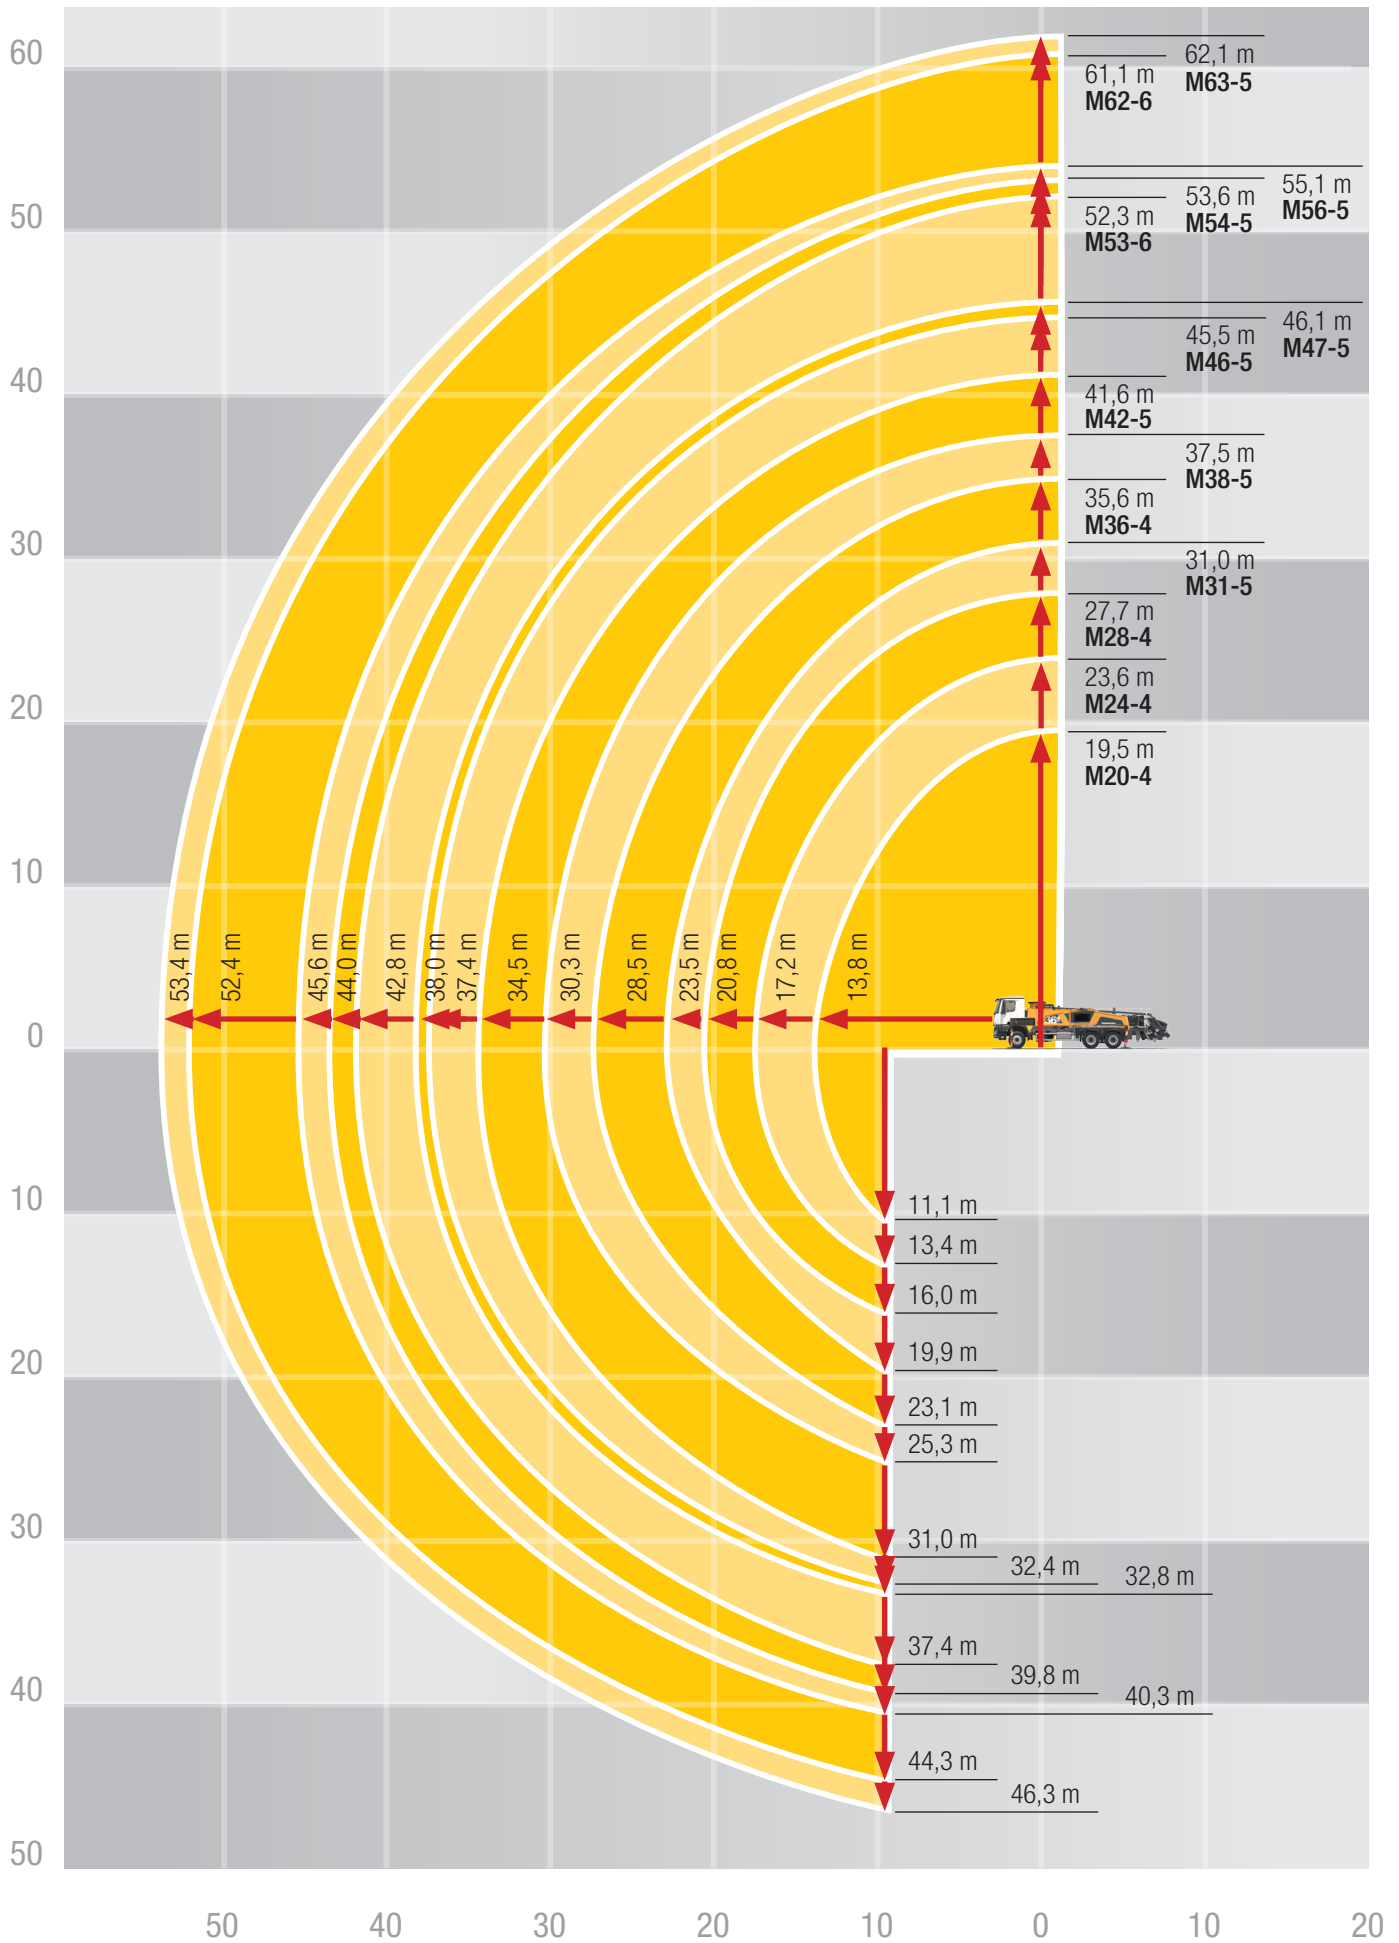

Overview unfolding height / support / vehicle dimensions

		Unfolding height	Support	Support width front	Support width rear	Vehicle height	Vehicle length
M20-4	m	3.90	Standard	3.40	2.60	3.40	8.79
M24-4	m	4.70 (depending on the frame height of the vehicle)	Standard OSS* iSC**	4.50 3.50 2.60 – 4.50	2.60 2.90 2.60	under 4.00	under 10.00
M28-4	m	6.30	Standard OSS* iSC**	5.20 3.90 2.60 – 5.20	2.60 2.90 2.60	3.85	9.99
M31-5	m	5.70	Standard OSS* iSC**	5.50 4.00 2.60 – 5.50	7.00 5.80 2.60 – 7.00	3.90	10.85
M36-4	m	8.50	Standard OSS* iSC**	5.50 4.00 2.60 – 5.50	7.00 5.80 2.60 – 7.00	3.90	11.50
M38-5	m	7.40	Standard OSS* iSC**	6.00 4.30 2.60 – 6.00	8.10 6.30 2.60 – 8.10	3.90	10.85
M42-5	m	8.60	Standard OSS* iSC**	7.50 5.00 2.60 – 7.50	8.30 6.40 2.60 – 8.30	4.00	11.35
M46-5	m	11.10	Standard OSS* iSC**	8.70 5.60 2.60 – 8.70	9.60 6.90 2.60 – 9.60	3.95	11.85
M47-5	m	11.10	Standard OSS* iSC**	8.70 5.60 2.60 – 8.70	9.60 6.90 2.60 – 9.60	3.95	11.85
M53-6	m	15.40	Standard OSS* iSC**	9.30 5.90 2.60 – 9.30	12.10 8.30 2.60 – 12.10	4.00	14.55
M54-5	m	15.40	Standard OSS* iSC**	9.30 5.90 2.60 – 9.30	12.10 8.30 2.60 – 12.10	3.97	14.43
M56-5	m	15.60	Standard OSS* iSC**	9.30 5.90 2.60 – 9.30	12.10 8.30 2.60 – 12.10	4.00	14.12
M62-6	m	23.00	Standard OSS* iSC**	12.40 7.50 2.60 – 12.40	12.20 8.30 2.60 – 12.20	unter 4.00	15.02
M63-5	m	23.00	Standard OSS* iSC**	12.40 7.50 2.60 – 12.40	12.20 8.30 2.60 – 12.20	unter 4.00	15.87

Note: Standard version. Dimensions and weights depend on truck, pump model and equipment.
 Dimensions can differ depending on configuration. Support width based on center of support leg.
 * OSS (One-side support) non EEA, no CE marking
 ** iSC (Full-flexible support) EEA, CE marking