







Batching Plant MT 0.35

Ready To Use Mixing Technology

Greater output, almost immediately

Putzmeister bring you a new compact 21m³/h Batching Plant – MT 0.35. This plant concrete directly to a Concrete Pump. An comes pre-assembled and can be directly installed on PCC. It requires no additional foundation or columns, saving time and resources. With the Putzmeister MT 0.35 you can start producing concrete in 1 day.

The ready plant is designed to discharge efficient pan mixer with durable wear parts delivers a consistent homogenous mix over a longer period/ volume of operation. The wide aggregate bins can be easily loaded using a backhoe loader with no additional modifications.

Designed to enhance productivity and profitability, this plant is ideal for RMC production at captive projects with space





Key Benefits

Quick erection and commissioning

- Plant is delivered almost pre-assembled and pre-wired
- Can be directly installed on PCC
- Concrete production can start in 1 day

Designed to maximize efficiency

- Pan mixer ensures consistent homogenous mix
- Complete discharge of concrete into concrete pump, no residual
- Load aggregate bins with backhoe loader
- No mixing of aggregates while loading

High degree of accuracy, Fully automated

- Digital belt weighing system ensures more accuracy
- Powered by fully automated SCADA system
- Plant can be run automatically and manually

Easy Maintenance and Safe Working Environment

- Preventive maintenance and interlocks in control
- Maintenance platforms with easy access to mixer, weighing systems and all other equipment

Versatile Mixing Options

ription			MT 0.35 Inclined Belt Conveyor & Compartment Bins
ral Plant capa	acity	m³/h	21*
Space rec	quired L x W (w/o silo)	m	10 x 4
Plant heig	nht (w/o silo)	m	4.5
Concrete	discharge height	m	1.75
Operating	voltage / Frequency	V/Hz	415 V / 50 Hz
g module Mixer		Туре	Pan Mixer PM 0.35
Input pow	rer	kW	15
Dry filling		m³	0.525
Compacte	ed concrete	m³	0.35
hing system Cement		kg	220
Water		kg	100
Additive		kg	3
oressor Max. pres	ssure	bar	9
Pressure f	tank volume	1	110
egate Storage No. of cor	mpartments	Qty	4
Total capa	acity	m³	12
Batching (gate per compartment	Qty	1
Filling wid	Ith per compartment	m	2.65
Filling hei	ght	m	3.2
rol system Automatic	Batch Control	Type	HMI / Software
Water Additive Max. pres Pressure to the gate Storage No. of correct to the gate Storage Storage Batching of Filling wide Filling height	tank volume mpartments acity gate per compartment Ith per compartment ght c Batch Control	kg kg bar I Qty m³ Qty m m	100 3 9 110 4 12 1 2.65 3.2

^{*}Plant capacity based on mixing time of 30 sec

Comprehensive Accessories (Optional)

- Cement / Fly-ash silo and its accessories
- Screw conveyor for Cement/ Fly-ash



#1 reason customers choose Putzmeister

AFTERSALES SUPPORT

Your Putzmeister Machine is in the best hands with our team. We ensure a high level of service, maintenance and genuine parts; we take care of your machine like no one else. Why? **We know your machine better than anyone else!**



Trained service experts ensure correct diagnosis and service



Genuine Putzmeister spare parts for long wear life and superior performance




Operations and maintenance solutions for Peace of Mind



Service expert allocated on time for uninterrupted operation



Annual maintenance/ service contracts for extended machine life

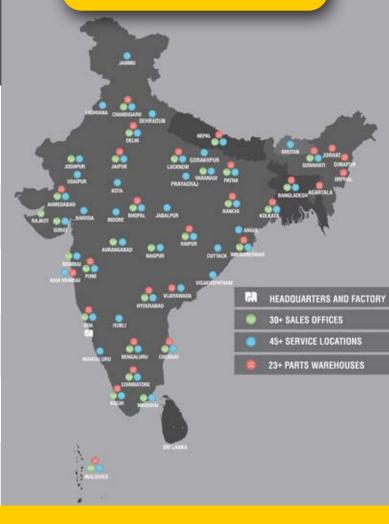

USE GENUINE PUTZMEISTER SERVICE USE GENUINE PUTZMEISTER PARTS

Scan to download the list of Putzmeister Authorized Spare Parts Dealers and Warehouses



Scan to check out range of concrete equipment and to download our brochures



Putzmeister Concrete Machines Pvt. Ltd.

Plot No. N4, Phase 4, Verna Industrial Estate, Salcette - Goa 403 722. INDIA Tel.: +91 (832) 6696 000 · Fax: +91 (832) 6696 300 Whatsapp: +91 91585 34123 · www.putzmeister.com



For all your support needs, **contact.india@putzmeister.com**