



Putzmeister

Stationary concrete pump

BSA 1407 H D


Output up to 72 m³/h

Delivery pressure up to 106bar



Performance Diagram



Technical data for concrete pump

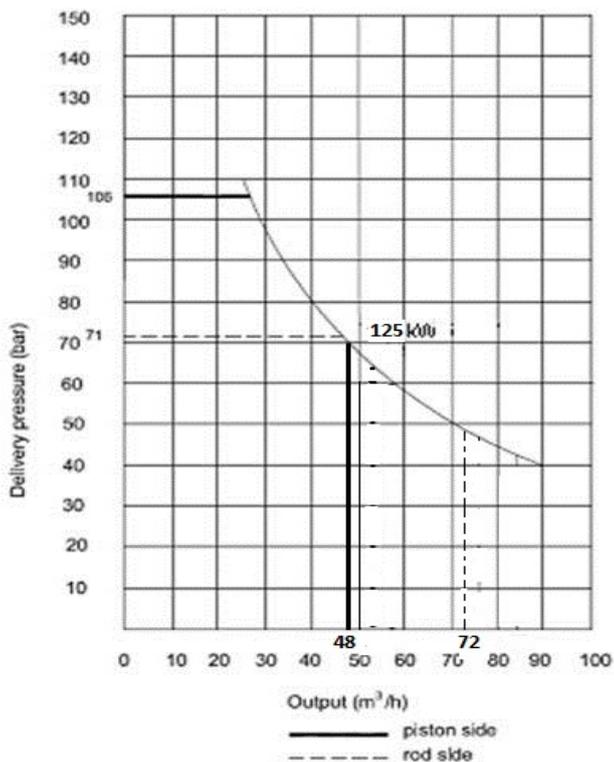


Model		BSA 1407 H D
Output	m ³ /h	72/48*
Delivery pressure	bar	71/106*
Delivery cylinder diameter	mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		27/18*
Engine power	kW	125
Hopper		RS 905A
Capacity	l	aprox. 600
Filling height	m	1.3
Transfer tube		S 2018 PN
Flap straight diameter	mm	150
Control system		OPS
Weight	Kg	4000

All data maximum theoretical

* Values for hydraulic fluid being fed to piston side

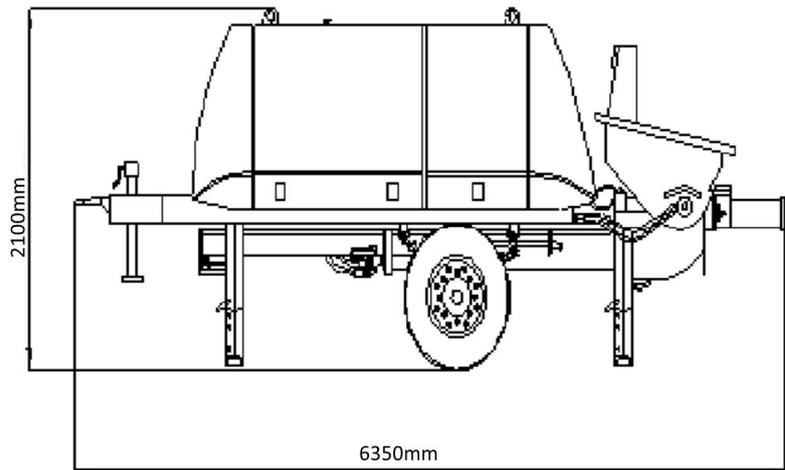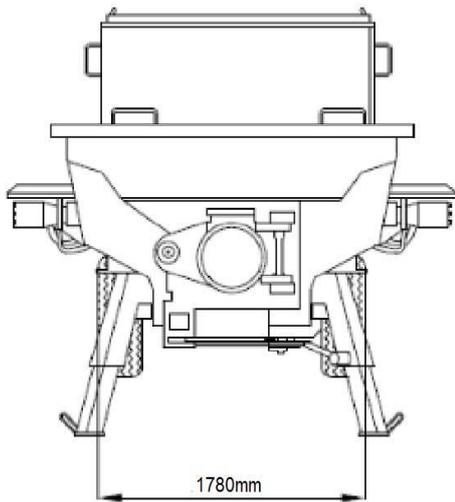

Hopper with S-valve

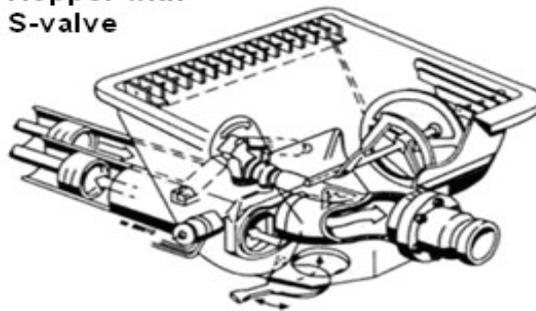

Scope of supply

Drive diesel engine, AL125 kW

Hopper with agitator

Operating manuals and spare part lists 2x

Trailer F 8, travelling on site

Auto Greasing system

Grille 70 mm

Splash guard

Mechanical jack with tow bar

Cast wear parts, highly wear resistant

Square outriggers 4x mech.15°-slanting

SBU

RSA- Grill Safety

Reducer kit, consisting of -reducer 6" – 5 1/2" – 1200mm including 6" coupling and seal

Optional

Flushing water pump, 22 bar, easy for operation

Connection kit for connecting alternative pipelines, consisting of:

- PM weld on ring 5 1/2"
- PM clamp coupling 5 1/2"
- PM seal 5 1/2"

Drive diesel engine, Volvo Penta, D5, 129kW

See quotation for exact serial delivery scope .
Comprehensive range of options available on request .