



## Stationary concrete pump

## BSA 1005 D5 (F80)

Output up to 52 m<sup>3</sup>/h Delivery pressure up to 70 bar

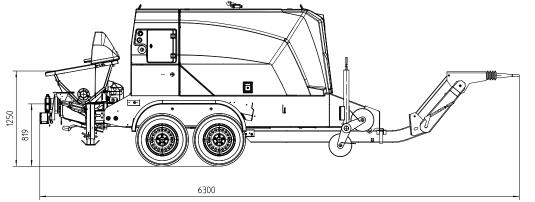



Note: Standard. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

## Technical data

Model		BSA 1005 D5 (F80)
Material number		102682.000
Output	m³/h	52
Delivery pressure	bar	70
Delivery cylinder	Ø mm	180
Delivery cyl. stroke	mm	1000
Strokes / minute		33
Engine / motor power	kW	55.4
Hopper		RS 488
Capacity	1	approx. 300
Filling height	m	1.25
Transfer tube		S 1812
Line connection	mm	SK 125
Pressure connection	н	5.5
Control system		Ergonic 3 PS
Diesel tank	I	120
Weight	kg	3100

## Serial equipment

Agitator safety switch off	Horn
Ball coupler (50 mm)	Operating manuals (1× paper,
Cable remote control 10 m	$1 \times$ CD-ROM) spare part list
Central lubrication on hopper	Output adjustment, electrical
with grease gun	Outriggers 3× mech.
Chassis F80	Speed drawdown automatically or pump stop (Diesel driven only)
Cleaning accessories	
Coloring:	Splash guard
Pump, frame, roof anthracite-grey	Support wheel
Doors chrome yellow	Tool set incl. standard equipment
Concrete hopper with agitator	
Drive diesel, Deutz 55.4 kW, Stage 5 (1005 D5)	
Electronic error management	
Ergonic Graphic Display	
Flushing water pump 50 l/min 20 bar	
Grill 60 mm	

All data maximum theoretical

See quotation for exact serial delivery scope. Comprehensive range of options available on request.

Putzmeister Concrete Pumps GmbH | P.O. Box 2152 | 72629 Aichtal | Tel. +49 7127 599-0 | Fax +49 7127 599-520 | pmw@putzmeister.com Right to make amendments reserved | © by Putzmeister | All rights reserved | Printed in Germany | 2309