

SANY TRUCK MOUNTED CONCRETE PUMP

SYG5180THB 300C-8

Convenient operation

- Mounted on 2-axle chassis
- Z Fold Boom with 4 arms
- Standard Wireless Remote
- Graphical Display with Live Pumping Parameters

Easy maintenance

- Automatic Centralized Greasing and Piston Lubrication
- Waterproof Hydraulic Cylinders
- High Pressure Cleaning System
- Cooling System


Safely pump tough concrete at high pressures

- Accumulator gives additional thrust
- High displacement motor keeps mix properly conditioned
- Proven S Valve
- Anti-Topple Safety Ball Valve



Technical Specifications

Model	Unit	SYG5180THB300C-8
Boom Specifications		
Type of fold/ Number of Arms	Fold/Arms	Z-Fold, 4 Arms
Vertical reach	m	30.1
Horizontal Reach	m	26.5
Reach depth	m	15.2
Unfolding height	m	9.6
End hose length	m	3
Delivery lines	mm	125
Slewing range	deg	+/-360
Filling height of hopper	m	1.3
Pump Specifications		
Concrete Cylinder Dia	mm	230
Stroke Length	mm	1600
Output/hr (Rod Side/Piston Side)	m ³ /hr	72 / NA
Strokes/Minute (Rod Side)	Nos./min	18
Concrete Pressure (Rod Side/Piston Side)	bar	65 / NA
Support and Dimensions	Front mm	5850
	Rear mm	5420

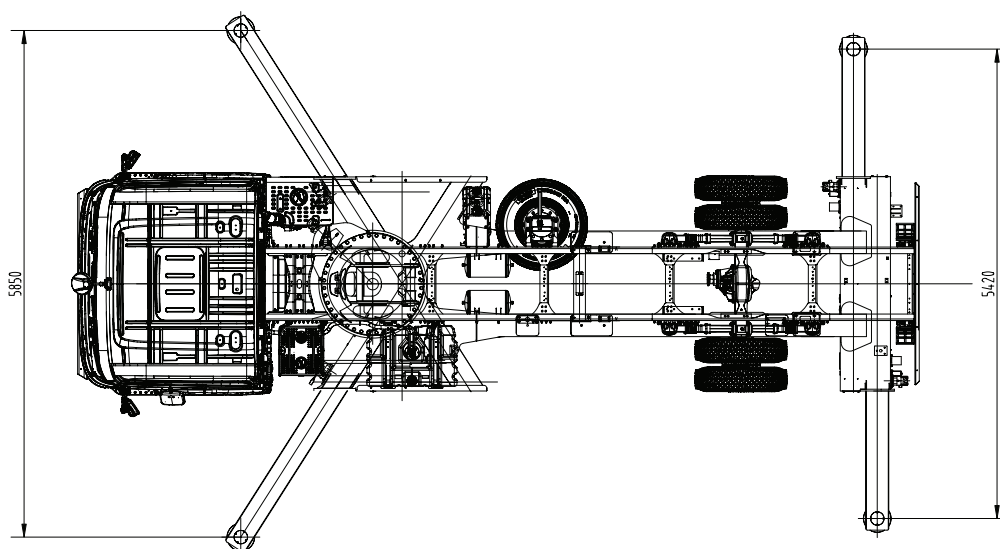

#SupportedByPutzmeister

Putzmeister Concrete Machines Pvt. Ltd.

Plot No. N4, Phase 4, Verna Industrial Estate,
Salcette - Goa 403 722. INDIA

Tel.: +91 (832) 6696 000

Whatsapp: +91 91585 34123 | www.putzmeister.com



For all your support needs, contact.india@putzmeister.com

Regional Offices: NORTH: 011 4200 5600, EAST: 033 6614 2525, WEST: 022 2636 0181 / 82, SOUTH: 040 4010 1015

Service Call Centre: NORTH: 99100 25721, EAST: 84200 59909, WEST: 90821 04420,

SOUTH (AP, TN): 78939 22727, SOUTH (KA, KL): 90080 65829