


# Stationary concrete pump

# BSA 1409 HP D

Output up to 92 m<sup>3</sup>/h  
 Delivery pressure up to 152 bar

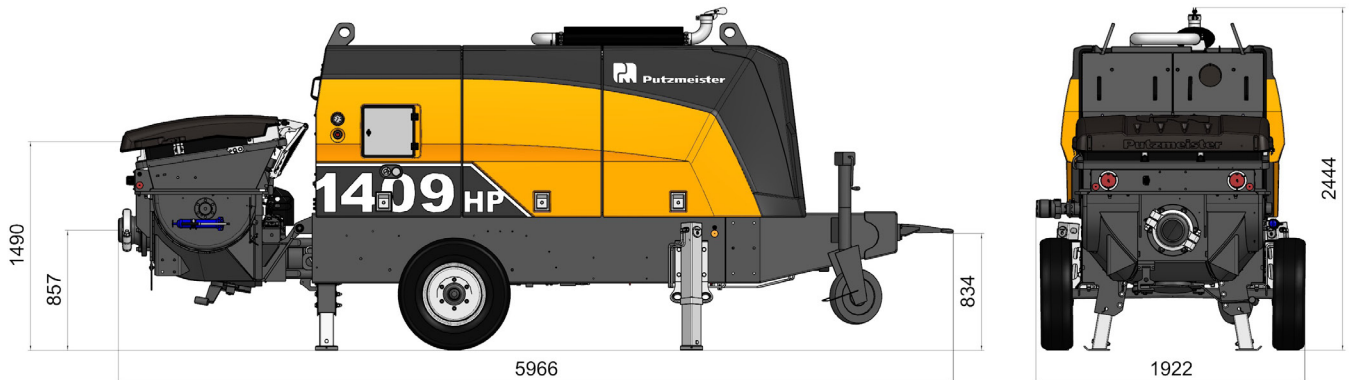

Note: Standard version. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

## Technical data

Model		BSA 1409 HP D
Material number		103272.000
Output	m <sup>3</sup> /h	92* / 57
Delivery pressure	bar	84* / 152
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		35* / 22
Engine power	kW	155
Hopper		RS 905 HF
Capacity	l	approx. 600
Filling height	m	1.49
Transfer tube		S 2015 D
Line connection	mm	ZX 125
Pressure connection	"	8.0
Control system		Ergonic 3 FFH
Weight	kg	6100

## Serial equipment

Agitator safety switch off	Flushing water pump 50 l/min 20 bar
Cable remote control 10 m	Gate valve connection
Central lubrication on hopper with grease gun	Grill 60 mm
Cleaning accessories	Hard metal wear parts kit
Coloring: Pump, frame and roof anthracite-grey Doors chrome yellow	Longlife delivery pistons
Concrete hopper with agitator	Operating manuals and spare part list
Concrete output adjust	Outriggers 4× mech.
Concrete pressure adjust	Pump flow meter
Drawbar eye (DIN)	Speed drawdown automatically on pump stop
Drive diesel, Deutz 155 kW, Stage IIIA	Splash guard foldable
Electronic error management	Support wheel
Ergonic Graphic Display (EGD)	Tool set incl. standard equipment
	Trailer F8, can be driven on site

\* Values for hydraulic fluid being fed to rod side.  
 All data maximum theoretical

See quotation for exact serial delivery scope.  
 Comprehensive range of options available on request.