


Concrete pump on crawler chassis

BSC 1409 D

Output up to 98 m³/h

Delivery pressure up to 109 bar

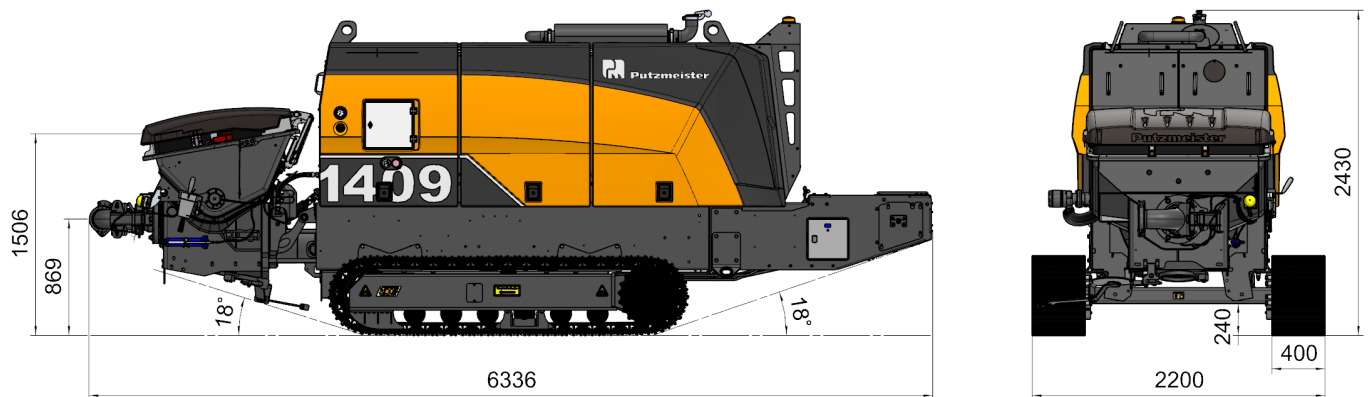

Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSC 1409 D
Material number		103527.000
Output	m ³ /h	98 / 66*
Delivery pressure	bar	73 / 109*
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		37 / 25*
Engine / motor power	kW	155
Hopper		RS 909
Capacity	l	approx. 600
Filling height	m	1.51
Transfer tube		S 2015 D
Line connection	mm	SK 125
Pressure connection	"	5.5
Control system		Ergonic 3 FFH
Weight	kg	7400

Serial equipment

Agitator safety switch off	Ergonic Graphic Display
Central lubrication on hopper with grease gun	Flushing water pump 50 l/min 20 bar
Cleaning accessories	Grill 60 mm
Coloring: Pump, frame, roof anthracite-grey Doors chrome yellow	Operating manuals and spare part list
Concrete hopper with agitator	Opto-acoustic warning in driving mode
Concrete output adjustment, electrical	Output adjustment, electrical
Concrete pressure adjustment, electrical	Radio remote control with display
Crawler, steel tracks	Speed drawdown automatically on pump stop
Drive diesel, Deutz 155 kW, STAGE IIIA	Splash guard foldable
Electronic error management	Swing-out elbow SK 125
	Tool set incl. standard equipment

* Values for hydraulic fluid being fed to piston-side
All data maximum theoretical

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.