


Truck-mounted Concrete pump

BSF 36-4.10 H

Output up to 95 m³/h
Delivery pressure up to 82 bar



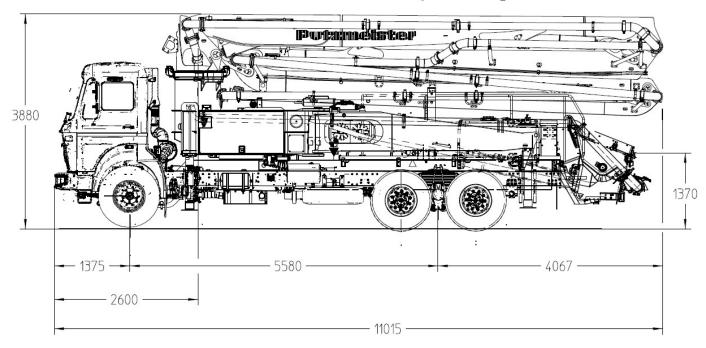

All data maximum theoretical.

Technical data for concrete pump


| Model | BSF 36.10H |
|---------------------------------|------------------------------------|
| Output | 95 m ³ / h |
| Delivery pressure | 82 bar |
| Delivery cyl. fl | 230 mm |
| Stroke of delivery cyl. | 1400 mm |
| Strokes volume of delivery cyl. | 116 L |
| Strokes / minute | 27 |
| Hydraulic ratio | 4.3 |
| Transfer tube | S transfer tube (S 2318LS) |
| Hopper | RS 909 Approx. 600L |
| Filling height | Approx. 1.35 m |
| Control system | Free flow hydraulics (FFH - EL) |

⁻ Dimensions, weights and engine power depend on truck model.

Technical data for boom

| Model | Boom M36-4 | | |
|-------------------|---------------------------|--|--|
| | | | |
| Reach height | 35.6 m | | |
| Horizontal reach | 31.4 m | | |
| Reach depth max. | 23.9 m | | |
| Unfolding height | 8.5 m | | |
| End hose length | 4 m | | |
| Delivery line | DN 125/ max. 85bar | | |
| Slewing circle | 365 ⁰ | | |
| Number of arms | 4 | | |
| Folding system | Z fold | | |
| Hydraulic control | Module boom control (MBC) | | |
| Remote control | Cable remote control | | |
| Support Front: | Telescoping, diagonally | | |
| Rear : | Swinging | | |

Reach information diagram, Support, Performance diagram

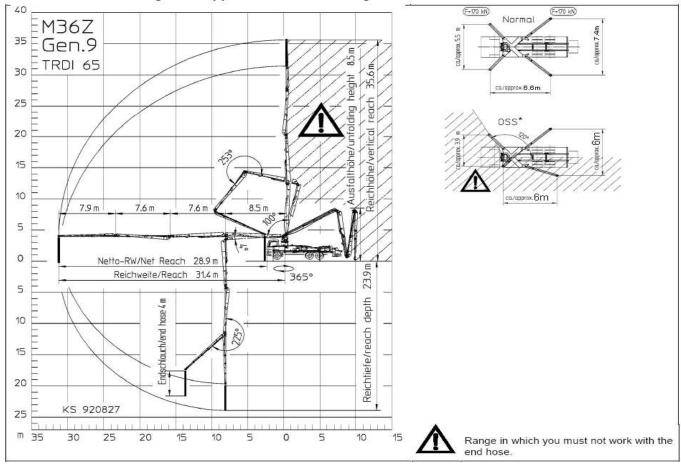

Scope of supply

| | (D (1) 1 D D T D | 1.1 10 | |
|------------------------|--------------------|---------------------|----------|
| Agitator safety cutout | (RSA) in RFID | with self-start pro | otection |

Concrete hopper RS 909 with agitator

Delivery cylinder chrome plated

End hose 4,0 m DN 125

Ergonic Graphic Display (EGD) with machine-failure-management

Ergonic Pump System (EPS) incl. Ergonic Output Control (EOC)

Flushing water pump 160 l/min 17-25 bar

Guard rail right side / grab left side

Hinged elbow with cleaning port

Horn via mushroom button at hopper

Operating manual (2xPaper), spare part list

Platform non-skid

pump on/off dependent on speed

Rear steps

Remote control with 40m cable, without display

Rubber collar at hopper

Splash guard fixed

S-transfer tube switchover normal/fast

Support plates at slewing legs in holder

Tool set incl. standard equipment

Towing eye

Water tank 500 L

Working light for lightening of hopper

Optional - Radio remote control proportional with display

Optional - Central lubrication hopper, electrically

Optional - One Sided Support - OSS

See quotation for exact serial delivery scope. Comprehensive range of options available on request .