

Stationary concrete pump


BSA 1404 E

Output up to 44 m³/h

Delivery pressure up to 85 bar



Performance Diagram

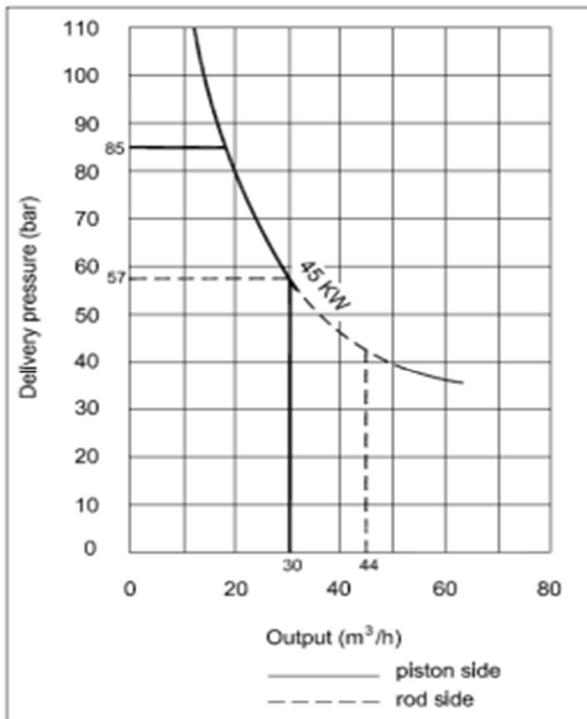


All data maximum theoretical

Technical data for concrete pump

Model		BSA 1404 E
Output	m ³ /h	44/30*
Delivery pressure	bar	57/85*
Delivery cylinder diameter	mm	200
Delivery cyl. stroke	mm	1000
Strokes / minute		23/16*
Electric motor	kW	45
Hopper		RS 905A
Capacity	l	aprox. 600
Filling height	m	1.3
Transfer tube		S 2018 PN
Flap straight diameter	mm	150
Control system		OPS
Weight	Kg	3500

* Values for hydraulic fluid being fed to piston side

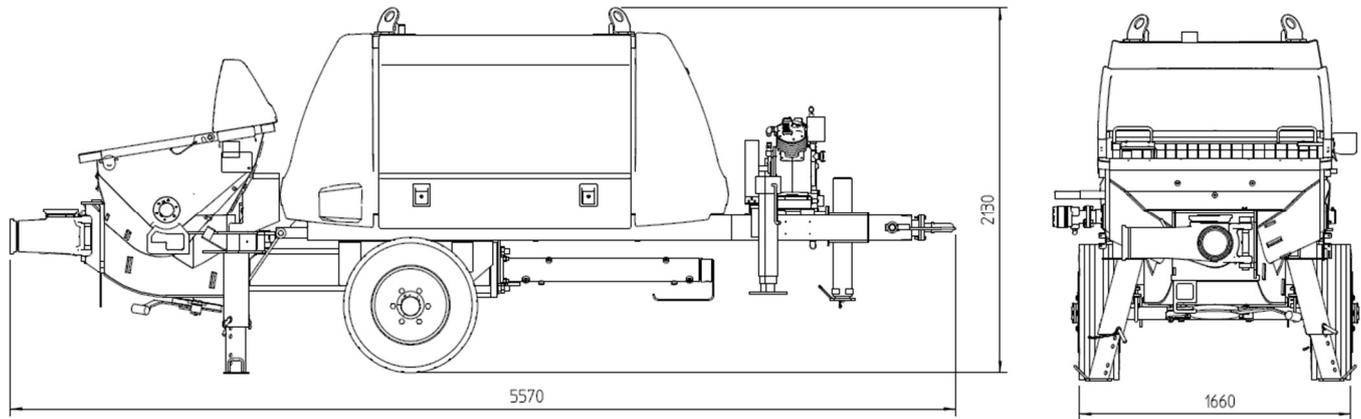

Scope of supply

Electric drive power, 45 KW, Siemens

Hopper with agitator

Operating manuals and spare part lists 2x

Trailer F 8, travelling on site

Central lubrication strip hopper

Grille 70 mm

Splash guard

Mechanical jack with tow bar

Cast wear parts, highly wear resistant

Chrome delivery cylinder

Square outriggers 3 Nos – (2 x mech.15°, -slanting, 1 x straight)

Reducer kit, consisting of -reducer 6" – 5 1/2 " – 1200mm including 6" coupling and seal

RSA- Grill Safety

SBU

Single agitator motor

Electronic control with full colour display and information



Optional

Flushing water pump, 22 bar, easy for operation

Connection kit for connecting alternative pipelines, consisting of:

- PM weld on ring 5 1/2 "
- PM clamp coupling 5 1/2 "
- PM seal 5 1/2 "

Compressor 7.5 HP, Max. working pressure 12bar, Anest Iwata, BLT75-14S1

Auto greasing system

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.