

Stationary concrete pump


BSA 1406 E

Output up to 57 m³/h

Delivery pressure up to 106 bar



Performance Diagram

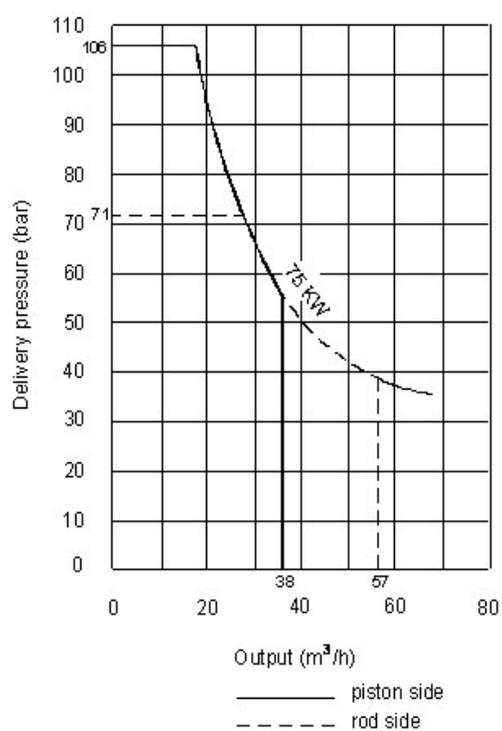


All data maximum theoretical


Technical data for concrete pump

Model		BSA 1406 E
Output	m ³ /h	57/38*
Delivery pressure	bar	71/106*
Delivery cylinder diameter	mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		21/14*
Electric Motor	kW	75
Hopper		RS 905A
Capacity	l	aprox. 600
Filling height	m	1.3
Transfer tube		S 2018 PN
Flap straight diameter	mm	150
Control system		OPS
Weight	Kg	3800

* Values for hydraulic fluid being fed to piston side

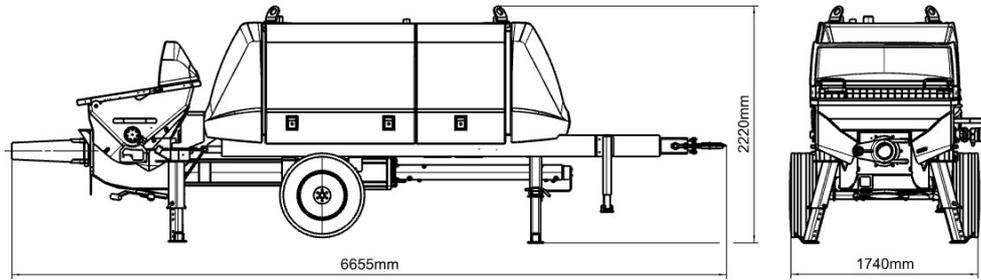

BSA 1406 E with Axel

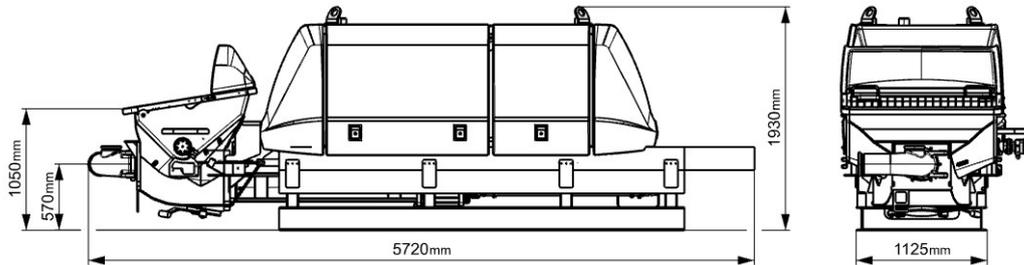

BSA 1406 E with Skid

Scope of supply

Electric drive power, 75 KW, Siemens

Hopper with agitator

Operating manuals and spare part lists 2x

Trailer F 8, travelling on site

Central lubrication strip hopper

Grille 70 mm

Splash guard

Mechanical jack with tow bar

Cast wear parts, highly wear resistant

Square outriggers 4x mech.15°-slanting

SBU

Single Agitator motor

Electronic control with full color display and information

Reducer kit, consisting of -reducer 6" – 5 1/2 " – 1200mm including 6" coupling and seal



Optional

Flushing water pump, 22 bar, easy for operation

Connection kit for connecting alternative pipelines, consisting of:

-PM weld on ring 5 1/2 "

-PM clamp coupling 5 1/2 "

-PM seal 5 1/2 "

Compressor 7.5 HP, Max. working pressure 12bar, Anest Iwata, BLT75-14S1

RSA – Grill safety

Skid – Delivery Ht. 570mm

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.