



Putzmeister

Stationary concrete pump


BSA 1410 D

Output up to 95 m³/h

Delivery pressure up to 106 bar



Performance Diagram


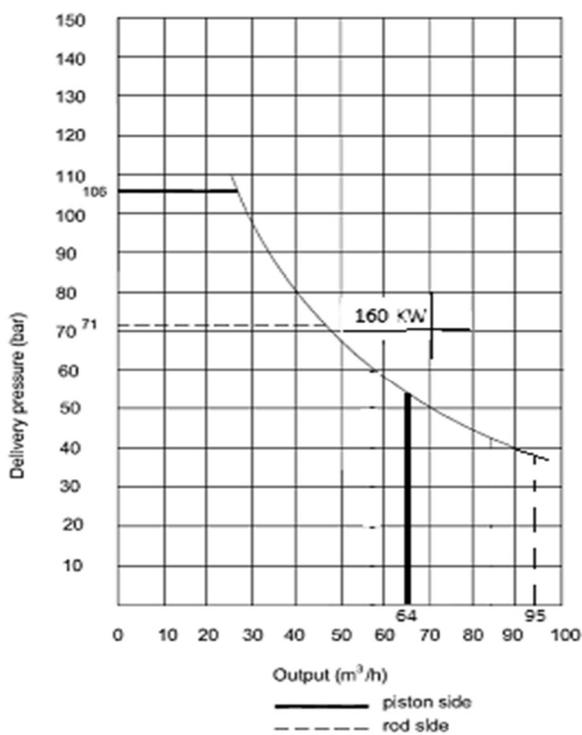


All data maximum theoretical


Technical data for concrete pump

Model	BSA 1410 D	
Output	m ³ /h	95/64*
Delivery pressure	bar	71/106*
Delivery cylinder diameter	mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		36/24*
Engine power	kW	160
Hopper		RSA 905 A
Capacity	l	aprox. 600
Filling height	m	1.3
Transfer tube		S 2018 PN
Flap straight diameter	mm	150
Control system		FFH
Weight	Kg	5000

* Values for hydraulic fluid being fed to piston side

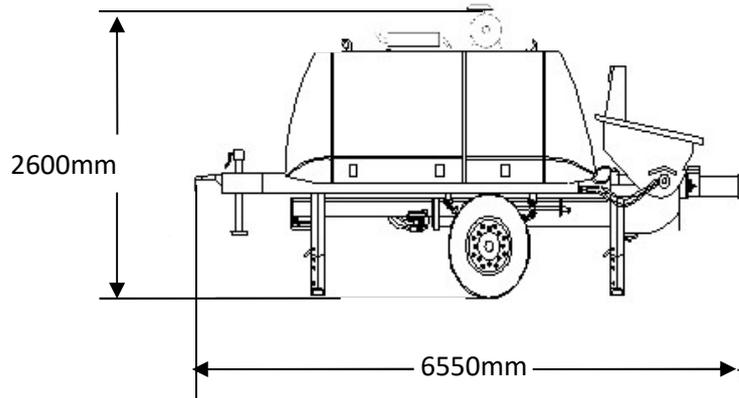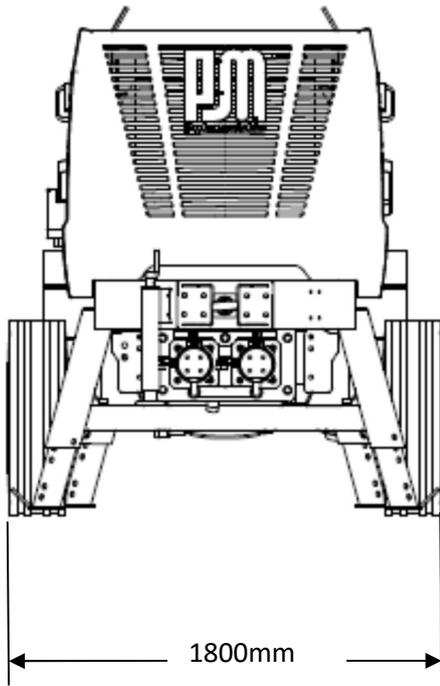

Hopper with S-valve

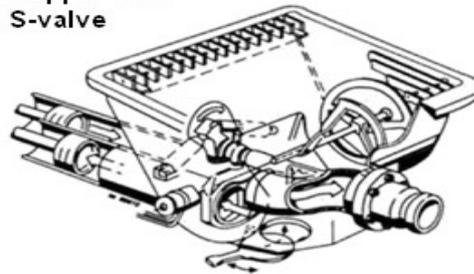

Scope of supply

Drive Diesel engine, VP D5 160 KW

Hopper with agitator

Operating manuals and spare part lists 2x

Trailer F 8, travelling on site

Centralized grease lubrication with hand pump

Grille 70 mm

Splash guard

Mechanical jack with tow bar

Cast wear parts, highly wear resistant

Square outriggers 4x mech.15°-slanting

SBU

RSA – Grill safety

Reducer kit, consisting of reducer 6" – 5 1/2 " – 1200mm including 6" coupling and seal

Optional

Flushing water pump, 22 bar, easy for operation

Connection kit for connecting alternative pipelines, consisting of:

- PM weld on ring 5 1/2"
- PM clamp coupling 5 1/2"
- PM seal 5 1/2"

Ashok leyland ALUW06DTI, 164 KW

See quotation for exact serial delivery scope .
Comprehensive range of options available on request .