



Putzmeister

Stationary concrete pump


BSA 2109 H D

Output up to 95 m³/h

Delivery pressure up to 152 bar



Performance Diagram

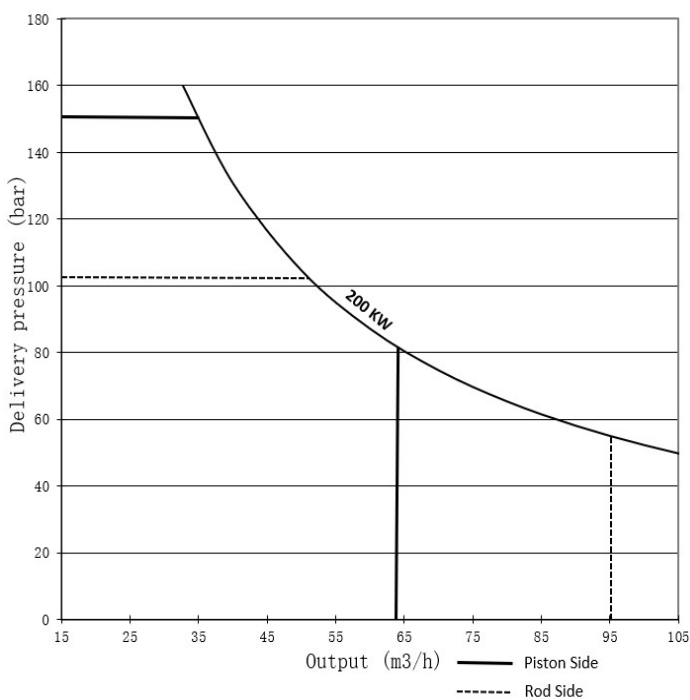


All data maximum theoretical

Technical data for concrete pump


Model		BSA 2109 H D
Output	m ³ /h	95/63*
Delivery pressure	bar	103/152*
Delivery cylinder diameter	mm	200
Delivery cyl. stroke	mm	2100
Strokes / minute		24/16*
Engine power	kW	200
Hopper		RS 905 HC
Capacity	l	aprox. 600
Filling height	m	1.2
Transfer tube		S 2015 DP
Flap straight diameter	mm	150
Control system		FFH-EL
Weight	Kg	7900

* Values for hydraulic fluid being fed to piston side

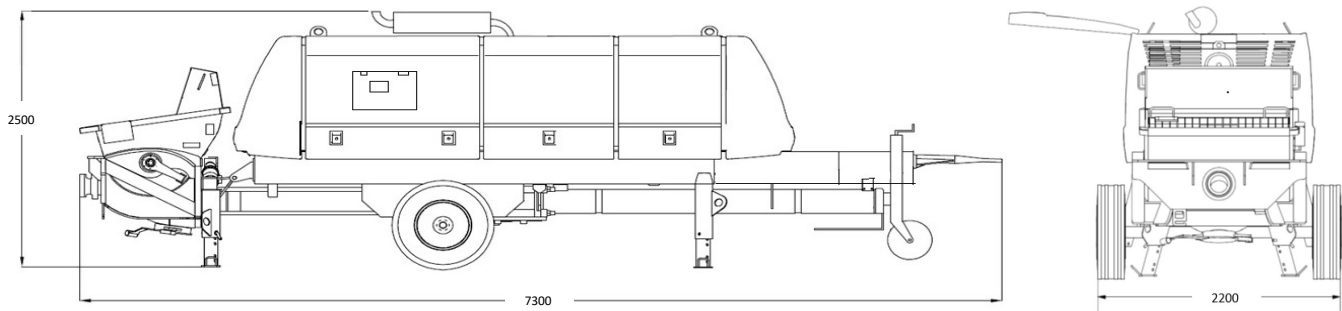

Note: All dimensions are in mm. The dimensions shown are mean values and apply to standard specifications.

Hopper with S-valve

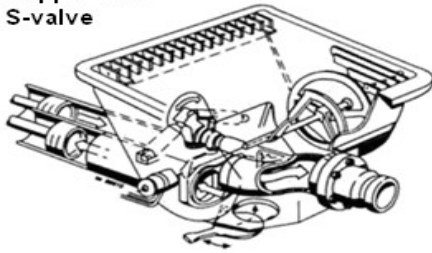

EGD - Ergonic Graphic Display

Scope of supply

Drive diesel motor Deutz 200 kW

Hopper with Single agitator motor

Operating manuals and spare part lists 2x

Trailer F 8, travelling on site

Auto Grease lubrication

Grille 70 mm

Splash guard

Mechanical jack with support wheel

Cast wear parts, highly wear resistant

Square outriggers 4x mech.15°-slanting

SBU

Hopper grate safety cut-out (RSA)

Flushing water pump, 22 bar, easy for operation

Cable remote control

Rubber collar for hopper

Hydraulic jack

Ergonic equipment

Concrete output adjust

Concrete pressure adjust

Electronic error management

Ergonic Graphic Display (EGD)

Pump flow meter

Speed drawdown automatically on pump stop

See quotation for exact serial delivery scope .
Comprehensive range of options available on request .