
Concrete pump on crawler chassis BSC 1409 D5

Output up to 98 m³/h
Delivery pressure up to 109 bar

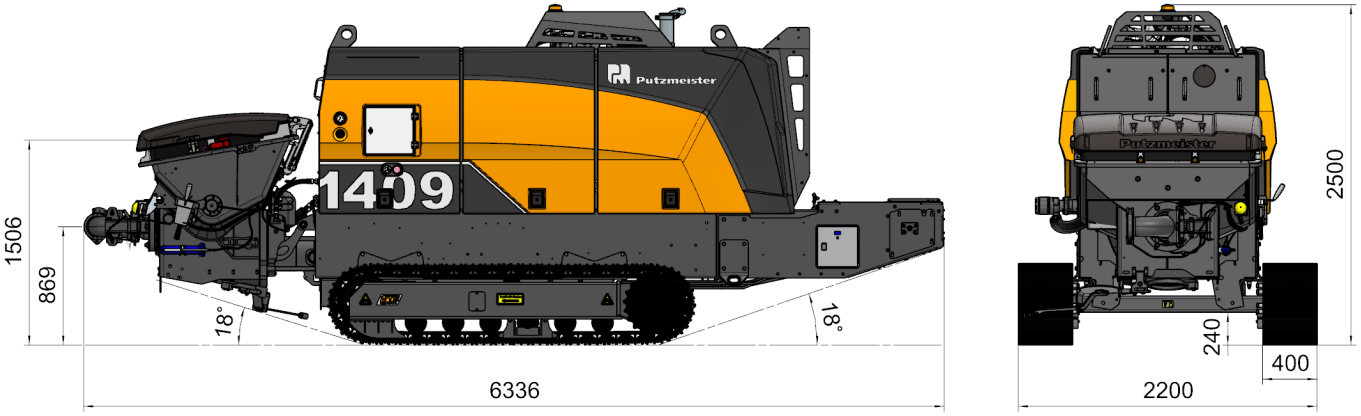

Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSC 1409 D5
Material number		103549.000
Output	m³/h	98 / 66*
Delivery pressure	bar	73 / 109*
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		37 / 25*
Engine / motor power	kW	180
Hopper		RS 909
Capacity	l	approx. 600
Filling height	m	1.51
Transfer tube		S 2015 D
Line connection	mm	SK 125
Pressure connection	"	5.5
Control system		Ergonic 3 FFH
Weight	kg	7800

Serial equipment

- Agitator safety switch off
- Central lubrication on hopper with grease gun
- Cleaning accessories
- Coloring: Pump, frame, roof anthracite-grey Doors chrome yellow
- Concrete hopper with agitator
- Concrete output adjustment, electrical
- Concrete pressure adjustment, electrical
- Crawler, steel tracks
- Drive diesel, Deutz 180 kW, STAGE V
- Electronic error management
- Ergonic Graphic Display
- Flushing water pump 50 l/min 20 bar
- Grill 60 mm
- Operating manuals and spare part list
- Opto-acoustic warning in driving mode
- Output adjustment, electrical
- Radio remote control with display
- Speed drawdown automatically on pump stop
- Splash guard foldable
- Swing-out elbow SK 125
- Tool set incl. standard equipment

* Values for hydraulic fluid being fed to piston-side
All data maximum theoretical

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.

Putzmeister Concrete Pumps GmbH | P.O. Box 2152 | 72629 Aichtal | Tel. +49 7127 599-0 | Fax +49 7127 599-520 | pmw@putzmeister.com
Right to make amendments reserved | © by Putzmeister | All rights reserved | Printed in Germany | 2509